


## Cable routing for ProPark<sup>®</sup> door systems

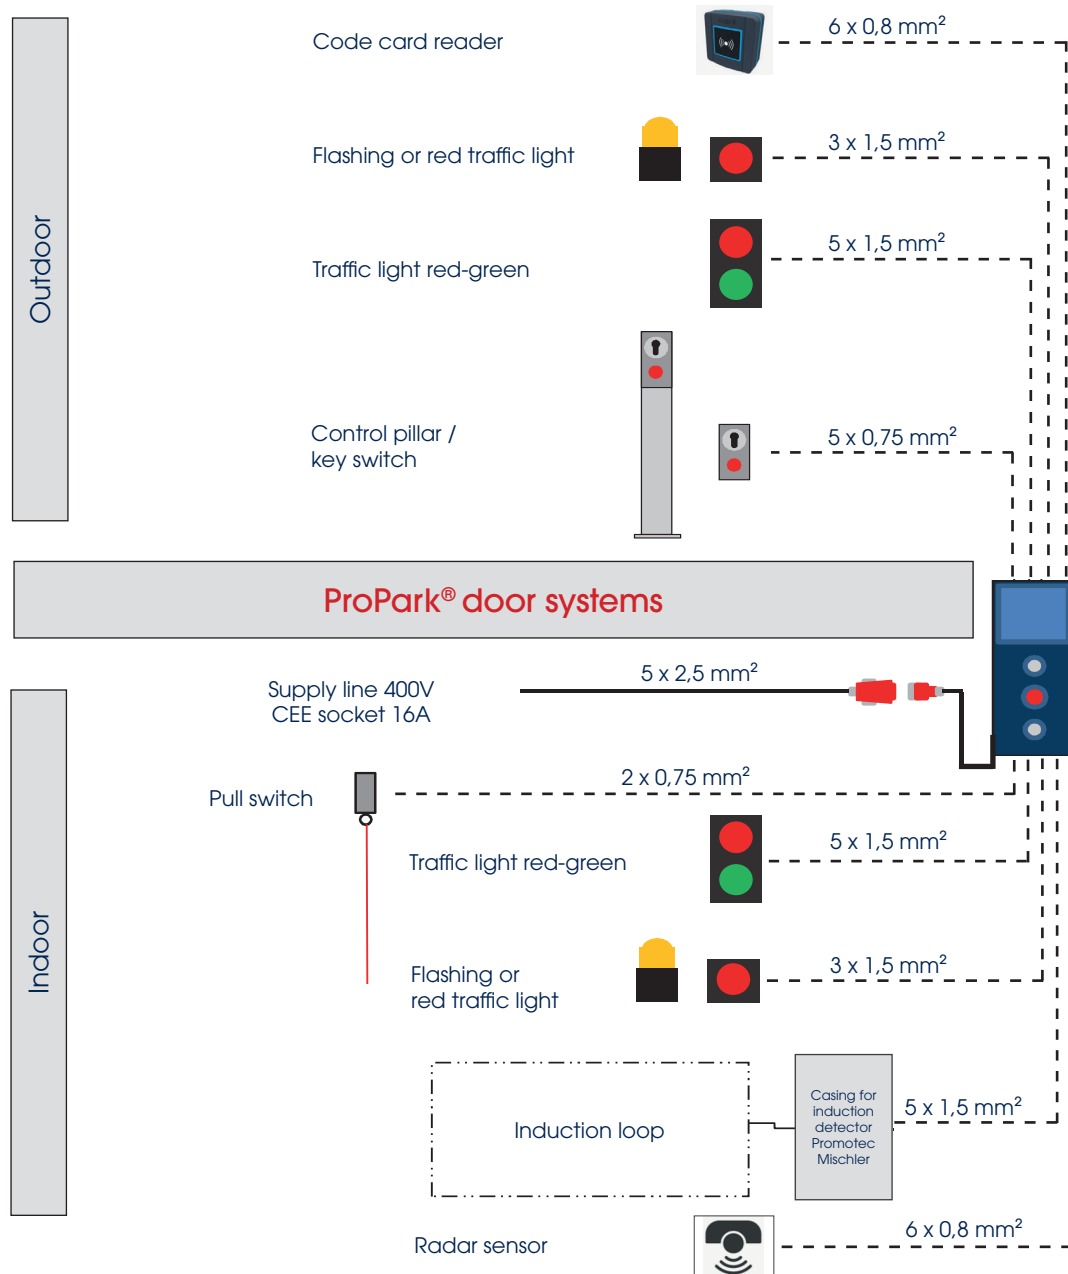

### Elements for on-site cable routing:

- |                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| <input type="checkbox"/> Supply line 400V CEE socket 16A     | 5 x 2,5 mm <sup>2</sup>  |
| <input type="checkbox"/> Control pillar / key switch         | 5 x 0,75 mm <sup>2</sup> |
| <input type="checkbox"/> Code card reader                    | 6 x 0,8 mm <sup>2</sup>  |
| <input type="checkbox"/> Pull switch                         | 2 x 0,75 mm <sup>2</sup> |
| <input type="checkbox"/> Traffic light red-green             | 5 x 1,5 mm <sup>2</sup>  |
| <input type="checkbox"/> Flashing light or red traffic light | 3 x 1,5 mm <sup>2</sup>  |
| <input type="checkbox"/> Radar sensor                        | 6 x 0,8 mm <sup>2</sup>  |
| <input type="checkbox"/> Induction loop *)                   | 5 x 1,5 mm <sup>2</sup>  |

\*) Routing up to the area near the loop; the casing for the induction detector is supplied by Promotec Mischler.